Excel in Your Field"

Specifications

CATEGORY	MT573C	MT573CPS	
ENGINE			
Type	4 Cylinder, CRDI, Water-cooled		
Model	L4C25-T		
Emission	Tier4 Final		
Engine HP, kW	73 (54.4)		
PTO, HP	62		
Rated speed, rpm			
Displacement, in ³		2,500 152.9	
Fuel tank capacity, gal	26.4		
DRIVE TRAIN		.0.4	
Transmission type (option)	Synchro Shuttle	Power Shuttle	
No. of speed	F20 x R20		
Forward speed, mph	0.12 ~ 20.6		
PTO	0,12	~ 20.0	
Type	Independent		
Rear, rpm	540 / 750 / 1,000		
HYDRAULIC SYSTEM	04071	0071,000	
Control system	Position / Draft		
Implement pump, gpm	13.2		
Steering pump, gpm	6.6		
Total flow, gpm	19.8		
Category, 3pt hitch	CAT II		
Hitch lift capacity, lbs	6,614		
Remote ports	3 pairs (Front), 3 pairs (Rear)		
DIMENSION	o lorging it total	it o braso li socil	
Overall length, Frame to link, in	150		
Overall width with tires, in	74.4		
Wheelbase, in	84.6		
Height to top, in	104.4		
Total weight without ballast, lbs	6,620 6,669		
TIRE SIZE		0,000	
Front	11.5	11.2 - 24	
Rear	16.9 - 30		

Front end Loader	LL6100	
Tractor Application	MT5 Series	
Bucket Size, in.	78	
Maximum Lift Height, in.	126.5	
Clearance with Attachment Dump, in.	95.3	
Reach at Maximum Height, in.	5.7	
Maximum Dump Angle, deg.	664	
Maximum Rollback Angle, deg.	388	
Digging Depth, in.	7700	
Overall Height in Carry Position, in.	6942	
Lift Capacity (@ Pivot pin), lbs.	35626	
Breakout Force (@ Pivot pin), Ibs.	666644	
Approx. Weight (Loader w/o Bucket), lbs.	1,232	


Note Specifications and design are subject to change without prior notice.

Get More Standard Features

- Power & tilt steering
- Switch operated Independent PTO
- Front loader valve and 3rd function joystick
- Deluxe adjustable seat
- Remote control valves (3 pair)
- Rear work light
- Hom
- · Deluxe cab with AC and heat
- · Cabin air recirculation
- Front & rear windshield washer/wipers
- · Deluxe stereo system with CD player

- 7 pin electrical connector
- Draw bar
- · Hydraulic draft & position control with auto lift
- Pre-heat starting aid
- Hand & foot accelerator control
- Safety flashers & turn signals
- Fuel, coolant temperature, tachometer & hour meter gauges
- Differential lock, parking brake, battery charging, engine oil pressure, fuel filter, hydraulic oil filter pressure, 4WD, PTO operation, high beam operation / warning lights



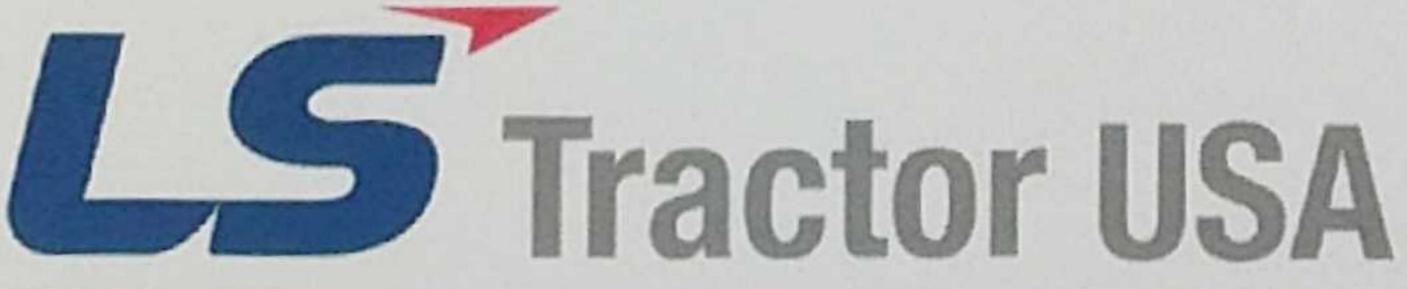

LS Tractor USA | P: 252.984.0700 | 6900 Corporation Parkway, Battleboro, NC F: 252.984.0701 | www.lstractorusa.com Dealer Imprint Zone

39000956 - 1707

