

Specification

CATEGORY	XJ2025H
ENGINE	
Type	3 - Cylinder, Indirect - injection, Water - cooled
Model(Tier 4)	Mitsubishi S3L2
Engine HP(gross)	24.4
PTO HP	18.5
Rated speed(rpm)	2,500
Displacement-cu(in ³)	80.4
Fuel tank capacity(gal)	6.6
Alternator(V-A)	12V - 50 Amps
DRIVE TRAIN	
Transmission	Hydrostatic Drive
No. of Speed	2 Ranges
Brakes	Wet, Multi - disc
Steering	Hydrostatic Power Steering
PTO	
Type	Independent
Rear(rpm)	Standard (540 rpm)
Mid(rpm)	Standard (2000 rpm)
HYDRAULIC SYSTEM	
Implement pump(gpm)	5.9
Steering pump(gpm)	2.6
Total flow(gpm)	8.5
Category(3pt hitch)	CAT 1
Hitch Lift capacity, lbs(Hitch end)	1,433
Lift control type	Position
DIMENSION	
Overall length(Bumper to link in)	103
Overall width with tires(in)	44.9
Wheelbase(in)	59
Ht to top of rops(in)	92.3
TIRE SIZE	
IND Front / Rear	23 x 8.5 - 12 / 33 x 12 - 16.5
Turf Front / Rear	23 x 8.5 - 12 / 33 x 12.5 - 16.5
WEIGHT	
Total weight without ballast(lbs)	1,609

Note Specifications and design are subject to change without prior notice.

Get More Standard Features

- Power steering
- Switch operated Independent PTO, rear & mid
- Lever selector for rear PTO, mid PTO or both
- Foldable ROPS
- Rear work light
- Hydraulic position control
- Differential lock
- Draw bar
- Pre-heat starting aid
- Safety flashers & turn signals
- Fuel, coolant temperature, tachometer & hour meter gauges
- Pre-heating, parking brake, battery charging, engine oil pressure, PTO operation and high beam operation/warning lights

This information is intended for self-study of product and is intended for the use of internal network of LS MTRON. LTD., its independent dealers in US. This information is to be treated as CONFIDENTIAL and is not to be used for advertising purpose. Competitive comparisons are based on competitive information known at the time of printing.

LS Tractor USA

LS Tractor USA | 6900 Corporation Parkway, Battleboro, NC
P: 252.984.0700 | F: 252.984.0701 | www.lstractorusa.com

Front End Loader	LL2101
Tractor Application	
Tractor Application	XJ2025H
Maximum Lift height(in)	85.7
Clearance with Attachment Dump(in)	65
Reach at Maximum Height(in)	22
Maximum Dump Angle(deg)	52
Maximum Rollback Angle(deg)	43
Digging Depth(in)	4.4
Overall Height in Carry Position(in)	42.8
Lift Capacity(@ Pivot pin)(lbs)	1,277
Breakout Force(@ Pivot pin)(lbs)	1,643
Approx. Weight (Loader w/o Bucket)(lbs)	638

Backhoe	LB1104
Tractor Application	
Tractor Application	XJ2025H
Digging Depth(in)	79.3
Reach from centerline of swing Pivot(in)	113.3
Loading Height(in)	56.9
Swing Arc(deg)	150
Transport Height(in)	75.2
Bucket Rotating(deg)	163
Stabilizer Spread(Down position)(in)	87.7
Stabilizer Spread(Up position)(in)	55.7
Bucket Digging force(lbs)	2,096

Mid-mount Mower	LM3560
Tractor Application	
Tractor Application	XJ2025H
Cutting Width(in)	60
Overall Width(in)	74
Cutting Height Range(in)	1 to 4-1/8
Deck shell Thickness(in)	10-Gauge (0.1345 in.) Grade 50 steel
Spindle Speed at 2000 RPM	2,842 RPM
Blade Tip Speed(ft./min)	18,000
Number of Blades	3
Blade Length(in)	21
Blade Width(in)	2-1/2
Blade Thickness(in)	1/4
Shipping Weight of Base 60" Deck(lbs)	450

Snow Blower	LS3150
Tractor Application	
Tractor Application	XJ2025H
Overall width(in)	50
Cutting width(in)	49 3/4
Cutting height(in)	20
Impeller drive	Chain #40
Auger drive	Worm gear
Auger diameter(in)	12 3/4
Impeller diameter(in)	15 3/4
Number of blades on impeller	3
Chute rotation	Manual
Adjustable heavy skid shoes	Yes

XJ Series

LS Tractor



Excel in Your Field™


A great looking little tractor
that does a lot of work



Modern, ergonomic design



Fuel efficient,
Reliable performance

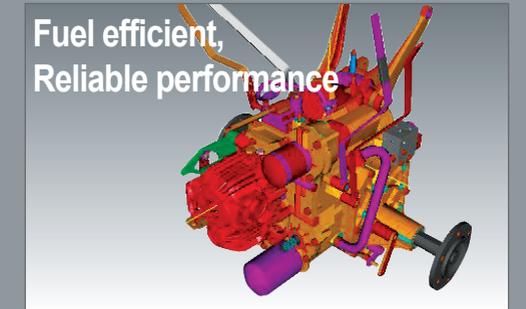

Easy to use



Carry heavier loads



Designed for comfort, style and ease of use

Redesigned interior provides sufficient space where the operator can work more easily and more comfortably

Interior



Redesign of instrument panel

Two-tone body panel



More visible instrument panel

Parking brake

Cruise control

PTO On/Off switch

Remote control lever(OPT)

3P hitch lift lever

Lever selector for rear PTO, mid-PTO

Deluxe seat

2 Range shift

2WD/4WD lever


Cup holder

B

A

C

D

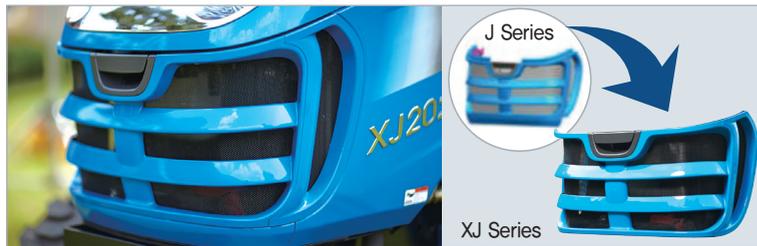

Upgraded grill design reduces foreign material from entering the engine compartment, helps prevent clogging of the radiator and engine overheating



Chrome headlight bezel enhances the sleek, modern design



Sloping hood design improves operator view of the front end



A More spacious legroom



B Wide platform for easy on and easy off



C Ergonomic layout of levers and controls




D Deluxe, comfortable seat

Dual hydraulic pump delivers improved front end loader and 3 point hitch lifting speeds



Superior hydraulic flow

- The XJ Series provides superior hydraulic flow for smoother, faster operation through upgrading existing single (12cc) pump into a tandem (9cc/4cc) pump in order to improve lifting speed of the loader & 3 point linkage
- XJ2025H has secured a competitive advantage in the workability of our pumps by designing smooth hydraulic flow throughout all sections

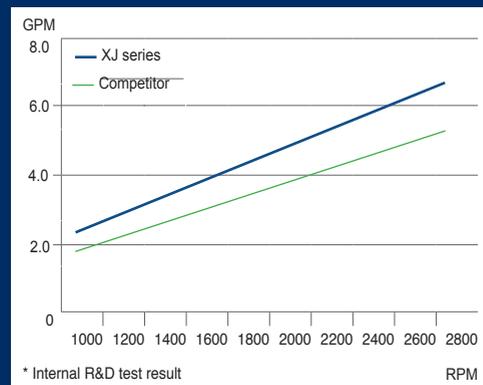

Up to 37% more hydraulic flow than competitive models
Secured top level of performance through applying the highest capacity of hydraulic pump

HST	XJ Series	Kubota BX2370-1	John Deere 1025R	Kioti CS2410
Total quantity of flow (gpm/lpm)	8.5/32.5	6.2/23.5	6.3/24.0	6.5/24.6




Best in class 3 point hitch and front end loader lift capacity

- Significantly more lift allows you to carry heavier loads and work more efficiently

	Top in Class XJ2025H	Kubota BX2370-1	John Deere 1025R	Kioti CS2410
Model				
3P hitch lift capa. @ 24 in, lbs (kgf)	1,058 (480)	680 (309)	681 (309)	700 (318)
Loader lift capa. @ pivot pin, lbs (kgf)	1,270 (576)	745 (338)	836 (380)	675 (306)

Improved operator comfort with less noise and vibration

Improved rubber engine mounting and TIER 4 engine combine for a smoother and quieter ride



Attachments

Front End Loader	60" Mid-mount Mower	6 1/2' Backhoe	50" Snow Blower
Quick and Easy Front End Loader	Compact Style Mid-mount Mower	Powerful Backhoe with Stability	Fast & Strong Snow Blower
Powerful front loader with heavy-duty frame and hydraulic cylinder delivers the best performance under any working condition	Suitable for house and farm lawn mowing and easy to attach and detach	Powerful excavation, quick lifting performance, precision and superior work performance with stable working position	Powerful front mount snow blower efficiently blows unwanted snows away from the road and landscapes
<ul style="list-style-type: none"> ■ Lifts more than the competition ■ Quickly attach or remove to best suit your applications 	<ul style="list-style-type: none"> ■ Sturdy drive-over deck attaches and removes easily ■ Adjustable cutting height 	<ul style="list-style-type: none"> ■ Quickly attach or remove ■ Adjustable seat maximizes comfort ■ Available 9", 12" and 16" bucket sizes 	<ul style="list-style-type: none"> ■ Powerful to quickly clear snow ■ Available with optional hydraulic controlled chute